


# TriStar MPPT™

## SOLAR CONTROLLER WITH MAXIMUM POWER POINT TRACKING

Morningstar's **TriStar MPPT** solar controller with TrakStar Technology™ is an advanced maximum power point tracking (MPPT) battery charger for off-grid photovoltaic (PV) systems up to 3kW. The controller provides the industry's highest peak efficiency of 99% and significantly less power loss compared to other MPPT controllers.

The TriStar MPPT features a smart tracking algorithm that maximizes the energy harvest from the PV by rapidly finding the solar array peak power point with extremely fast sweeping of the entire I-V curve. This product is the first PV controller to include on-board Ethernet for a fully web-enabled interface and includes up to 200 days of data logging.

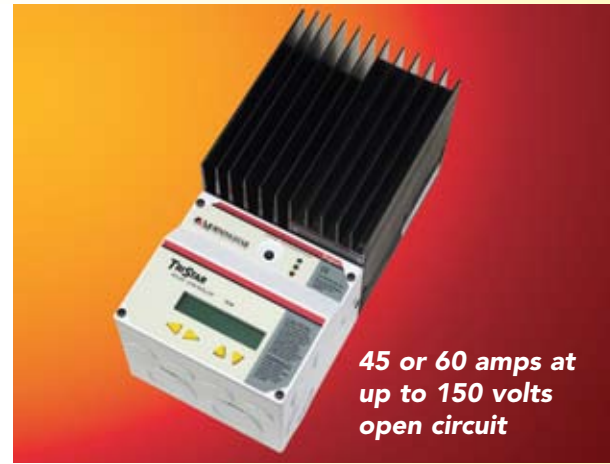

**45 or 60 amps at  
up to 150 volts  
open circuit**

Product shown with optional meter.

### Key Features and Benefits

#### ■ Maximizes Energy Harvest

Our TrakStar MPPT Technology features:

- Better peak power point tracking than other MPPT controllers
- Very fast sweeping of the entire I-V curve
- Recognition of multiple power points during shading or mixed PV arrays
- Excellent performance at sunrise and low solar insolation levels

#### ■ Extremely High Reliability

- Robust thermal design and no cooling fans
- Parallel circuit design provides less stress and longer life for electronic components
- No mechanical relays
- Extensive electronic protections including PV short circuit protection
- Epoxy encapsulated inductors and conformally coated printed circuit boards

#### ■ Very High Efficiency

- Peak efficiency of 99%
- Proprietary tracking algorithm minimizes power losses
- Low self-consumption
- Continuous operation at full power to 45°C without need to de-rate
- Selected electronic devices with higher ratings to minimize losses from heating

#### ■ Extensive Networking and Communications Capabilities

Enables system monitoring, data logging and adjustability. Uses open standard MODBUS™ protocol and Morningstar's MS View software.

- Meterbus: communications between compatible Morningstar products
- Serial RS-232: connection to a personal computer
- EIA-485: communications between multiple devices on a bus
- Ethernet: fully web-enabled interface to a local network or internet; view from a web browser or send email/text messages.

#### ■ Metering and Data Logging

- Optional TriStar meter and remote meter provides detailed operating data, alarms and faults
- Three LED's display system status
- Up to 200 days of data logging via meters or communications ports

System Status:

|        |     |       |
|--------|-----|-------|
| 53.60V | 28C | 54.2A |
| 2867W  |     | MPPT  |

Data Logging:

|       |            |         |            |
|-------|------------|---------|------------|
| Today | Batt       | Day: -1 | Batt       |
|       | 46.4 Vmin  |         | 47.2 Vmin  |
| Today | Solar      | Day: -1 | Solar      |
|       | 58.9 Amax  |         | 56.8 Amax  |
| Today | Solar      | Day: -1 | Solar      |
|       | 107.2 Vmax |         | 105.5 Vmax |

## TECHNICAL SPECIFICATIONS

### Electrical

|                               | TS-MPPT-45                    | TS-MPPT-60                            |
|-------------------------------|-------------------------------|---------------------------------------|
| • Maximum Battery Current     | 45 amps                       | 60 amps                               |
| • Nominal Maximum Solar Input | 12 Volt<br>24 Volt<br>48 Volt | 600 Watts<br>1200 Watts<br>2400 Watts |
|                               |                               | 800 Watts<br>1600 Watts<br>3200 Watts |

### TS-MPPT-45 and TS-MPPT-60

- Peak Efficiency 99%
- Nominal System Voltage 12, 24, 36 or 48 volts DC
- Max. Solar Open Circuit Voltage 150 volts DC
- Battery Operating Voltage Range 8-72 volts DC
- Maximum Self-consumption 2.7 Watts
- Transient Surge Protection 4500 Watts/port

### Electronic Protections

- Solar: Overload, Short Circuit, High Voltage
- Battery: High Voltage
- High Temperature
- Lightning and Transient Surges
- Reverse Current at Night

### Battery Charging

- Charging algorithm 4-stage
- Charging stages Bulk, Absorption, Float, Equalize
- Temperature Compensation
  - Coefficient -5mV/°C/cell (25° ref)
  - Range -30°C to +80°C
  - Set points Absorption, Float, Equalize, HVD


Note: Remote Temperature Sensor is included.

### Mechanical

- Dimensions 29.1 x 13.0 x 14.2 cm  
11.4 x 5.1 x 5.6 inch
- Weight 4.2 kg / 9.2 lbs.
- Max. Wire Size 35 mm<sup>2</sup> / 2 AWG
- Conduit knockouts M20; ½, 1, 1 ¼ inch
- Enclosure Type 1 (indoor and vented)  
IP20

### Environmental

- Ambient Temperature -40°C to +45°C
- Storage Temperature -55°C to +100°C
- Humidity 100% non-condensing
- Tropicalization Epoxy encapsulation  
Conformal coating  
Marine rated terminals

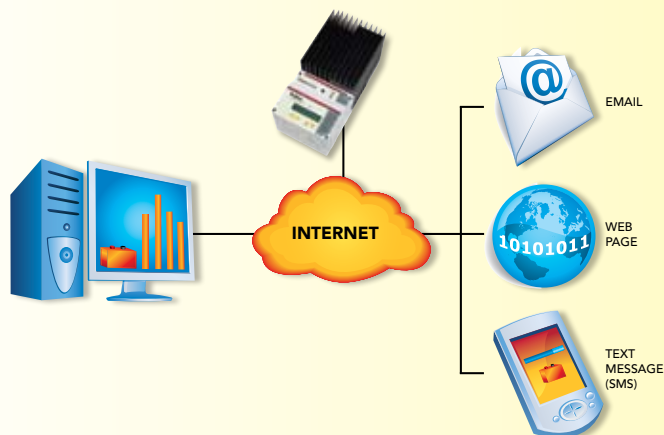

### Communication Ports

|            | TS-MPPT-45 | TS-MPPT-60 |
|------------|------------|------------|
| • MeterBus | Yes        | Yes        |
| • RS-232   | Yes        | Yes        |
| • EIA-485  | No         | Yes        |
| • Ethernet | No         | Yes        |

### Options

- TriStar Meter-2 (TS-M-2)
- TriStar Remote Meter-2 (TS-RM-2)
- Meter Hub (HUB-1)
- Relay Driver (RD-1)

### Certifications

- CE Compliant
- ETL Listed (UL1741)
- cETL (CSA C22.2 No. 107.1-01)
- FCC Class B Part 15 Compliant
- Complies with (NEC) U.S. National Electric Code
- RoHS Compliant
- Manufactured in a certified ISO 9001 facility

**WARRANTY:** Five year warranty period. Contact Morningstar or your authorized distributor for complete terms.

**AUTHORIZED MORNINGSTAR DISTRIBUTOR:**

8 Pheasant Run  
Newtown, PA 18940 USA  
Tel: +1 215-321-4457 Fax: +1 215-321-4458  
E-mail: [info@morningstarcorp.com](mailto:info@morningstarcorp.com)  
Website: [www.morningstarcorp.com](http://www.morningstarcorp.com)